
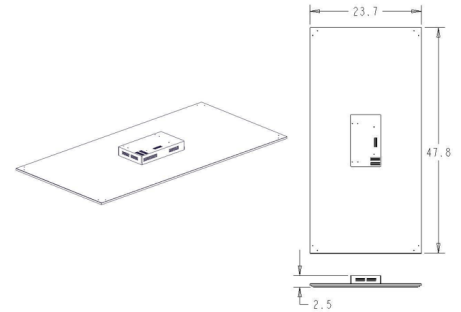


Project: \_\_\_\_\_  
 Type: \_\_\_\_\_  
 Catalog No: \_\_\_\_\_  
 Qty: \_\_\_\_\_  
 Specifiers: \_\_\_\_\_  
 Line Notes: \_\_\_\_\_

**Flat Panel**

**GFR24**

598mm X 1200mm x 63mm  
 (2x4x2.5" nominal)

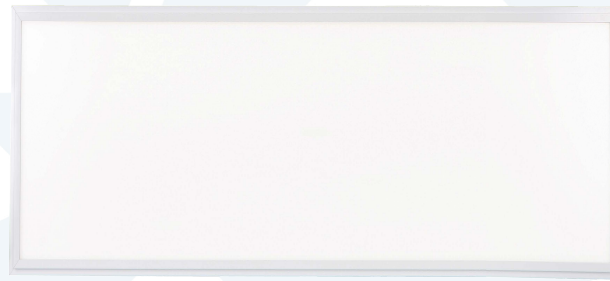

**Ordering Guide**

| Series | Mount Method  | CCT  | Wattage   | Control Type  | Input Voltage   | Wet/Dry                              | Body Finish  |
|--------|---|--|---|---|---|--------------------------------------|--|
| GXXXX  | X   | XX   | XXW   | X   | XXXV  | XXXXX                                | XXXXX  |
|        | <b>T</b> T-Bar Drop In (Standard)<br><b>P</b> Pendant Mount (Requires pendant kit)<br><b>R</b> Recessed (Requires recessed mounting kit)<br><b>S</b> Surface Mount / Wall Mount (Requires surface mounting kit) | 3000K (+/- -100k)<br>3500K (+/- -100k)<br>4000K (+/- -100k)<br>4500K (+/- -100k)<br>5000K (+/- -100k)<br>5500K (+/- -100k)<br>6000K (+/- -100k)<br>6500K (+/- -100k)<br><b>ER</b> Ergonomic Color Changing Option with user-adjustable CCT range from 2700k to 6500k | <b>60W</b> 60 Watts (Standard)<br><b>75W</b> 75 Watts | <b>D</b> 0-10V Dimming (Standard)<br><b>N</b> No Dimming required<br><b>DALI</b> - Dali | <b>120V</b> 120V AC/DC (Standard)<br><b>277V</b> 277V AC/DC<br><b>347V</b> 347V AC/DC | <b>Wet IP 64 rated</b><br><b>Dry</b> | <b>Silver / White</b> (Standard)<br><br>Custom colors available, please inquire. |

Note: Not all options are available on all fixtures. Please inquire to be sure your part number is accurate.

**Optical Performance**

|                |       |
|----------------|-------|
| Nominal CCT    | 4000K |
| Flux (lm)      | 6200  |
| Efficacy (lm/) | 110   |
| W) Power       | 60    |
| (W) CCT (K)    | 3983  |
| CRI            | 92    |
|                |       |
|                |       |
|                |       |

**Photometry 4000K**

